



ESS-1450HD2™

HIGH SPEED DECANTER CENTRIFUGE



Whether you are working toward maximizing product recovery or looking to get the most out of your “zero-discharge” closed-loop system, Elgin’s field proven solids control and dewatering centrifuges are a perfect choice. With over 600 centrifuges delivered worldwide, Elgin’s ESS-1450HD2 is a field proven solution.

Natural Resource Recycling • Product Classification
Dewatering • Fluid Recovery • Waste Management
Material Handling • Liquid/Solid Separation




10050 Cash Road
Stafford, Texas 77477 • 281-261-5778
www.elginseparationsolutions.com

Power and Performance

Elgin’s ESS-1450HD2 is fitted with a NEMA premium, continuous duty, poly-chain driven, 50 hp main drive. The 50 hp main drive can operate the centrifuge up to a maximum rotational speed of 3,250 rpm, thus, generating more than 2,100 G’s of force. By using an adjustable motor mount, motor and belt maintenance is made easy by the adjustment of two jack screws. No additional motor mounts, brackets, or tensioning devices are required.

By utilizing a carbon fiber poly-chain, no belt retensioning is required after installation is complete. The carbon fiber tensile cords are length-stable and can withstand shock loads that frequently lead to belt failure. More importantly, Elgin’s carbon fiber poly-chain will not require quarterly replacement, saving thousands in annual maintenance expenses. Elgin’s ESS-1450HD2 centrifuge can be fitted with either a 52:1 or a 125:1 planetary gear box.

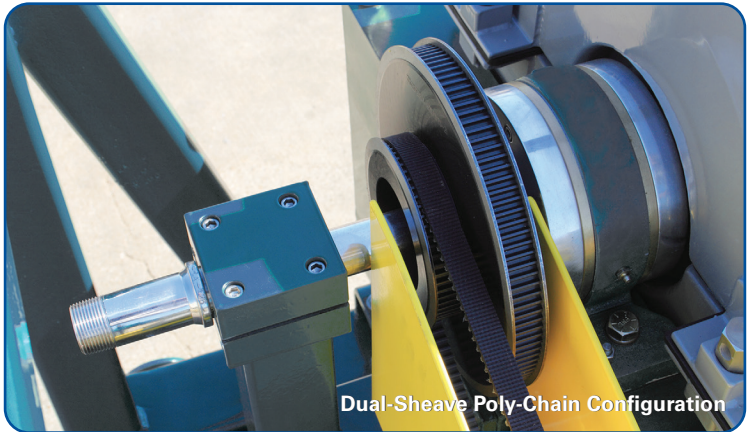

Field Skid Configuration

Assembled in an “offset skid” configuration, Elgin’s ESS-1450HD2 requires limited effort to install. Utilizing explosion-proof electrical and controls, the control panel is provided with a convenient “pig-tail” electrical connection.


Elgin has also optimized the required footprint and redesigned its lifting system so that the entire assembly may be lifted from either the base lifting mounts or the lift eyes.

Not only does the offset main-drive configuration allow direct access to the motor and belts for efficient maintenance, but it also achieves a shorter end-to-end centrifuge length and lower center of gravity, therefore providing a greater level of installation flexibility.

Effluent Management

Elgin’s ESS-1450HD2 centrifuge uses four, stainless steel, epicyclic, liquid-end discharge ports. Each port can be rotated to the desired pond depth setting, therefore allowing the operator to make efficient changes in pond depth by simply loosening the set screws.

The ESS-1450HD2 utilizes four, “wide-mouth” tungsten carbide discharge ports and plows. These features allow the ESS-1450HD2 to handle large volumes of erosive solids without damaging the centrifuge.

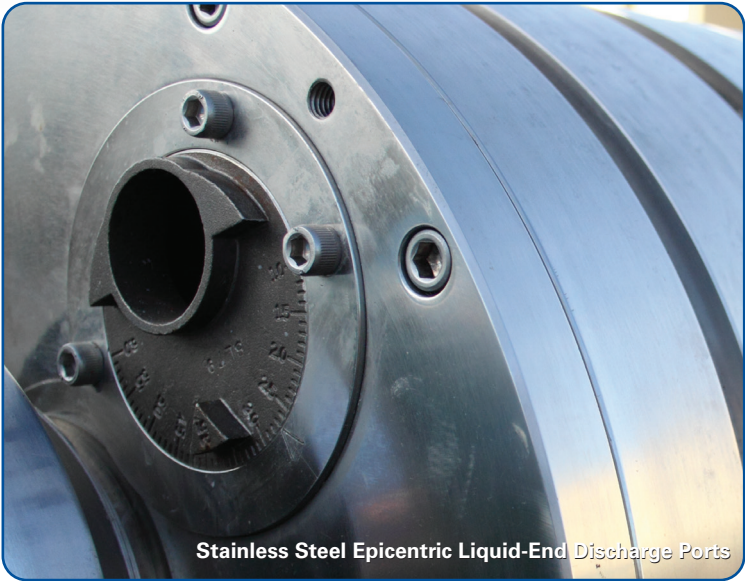

The ESS-1450HD2 centrate discharge hopper is ported to allow bottom, front or rear fluid discharge. Each of the three fluid discharges are fitted with 6” (15.24 mm) Victaulic™ connections.

Rotating Assembly

Elgin’s ESS-1450HD2 stainless steel rotating assembly is 14” (356 mm) in diameter and 49.5” (1,257 mm) in length. By using a length over diameter ratio of 3.5, Elgin achieves an extremely stable centrifuge, even at maximum rotational speed. The rotating




assembly is given further stability by the use of two SKF™ premium bearings. Both bearings are installed in precision-machined pillow blocks. Equipped with externally accessible grease ports, daily greasing can be performed without the removal of machine guards. The internal flights are lined with tungsten carbide tiles along the entire length of both the clarification and the tapered section, extending the ESS-1450HD2’s ability to manage erosive solids.

To protect the upper cover from the radial discharge of solids, a 180 degree radial, protective deflector plate has been incorporated into the upper stainless steel centrifuge lid.


Control System Options

Depending on your budget and performance needs, the ESS-1450HD2 can be fitted with either a Dual-Sheave Poly-chain, Mechanical Variable Drive (“DSP MVD”) or any number of Variable Frequency Drive (“VFD”) configurations.


Elgin’s new DSP MVD provides a new low-cost alternative to operators. Elgin’s DSP MVD allows operators to operate the ESS-1450HD2 at two different speeds without the complete disassembly of the fluid-end and sheaves, or the cost of the VFD control system. Instead, by simply loos-

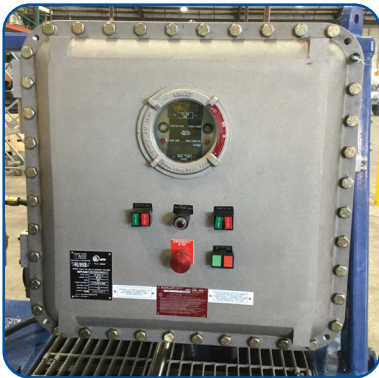

ening the jack bolts on the motor mount base-plate, the poly-chain can be adjusted to the adjacent sheave. As a result, Elgin’s ESS-1450HD2 centrifuges fitted with a DSP MVD drive can achieve both 1,250 and 3,250 rpm (460 V / 60 Hz) or 1,600 and 2,400 rpm without having two sets of sheaves or belts. Alternatively, Variable Frequency Controlled centrifuges allow the operator to change the centrifuge cut point with the flip of a switch.

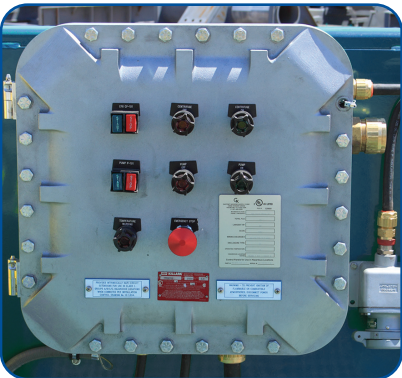

Control Panels Shown in Various Configurations

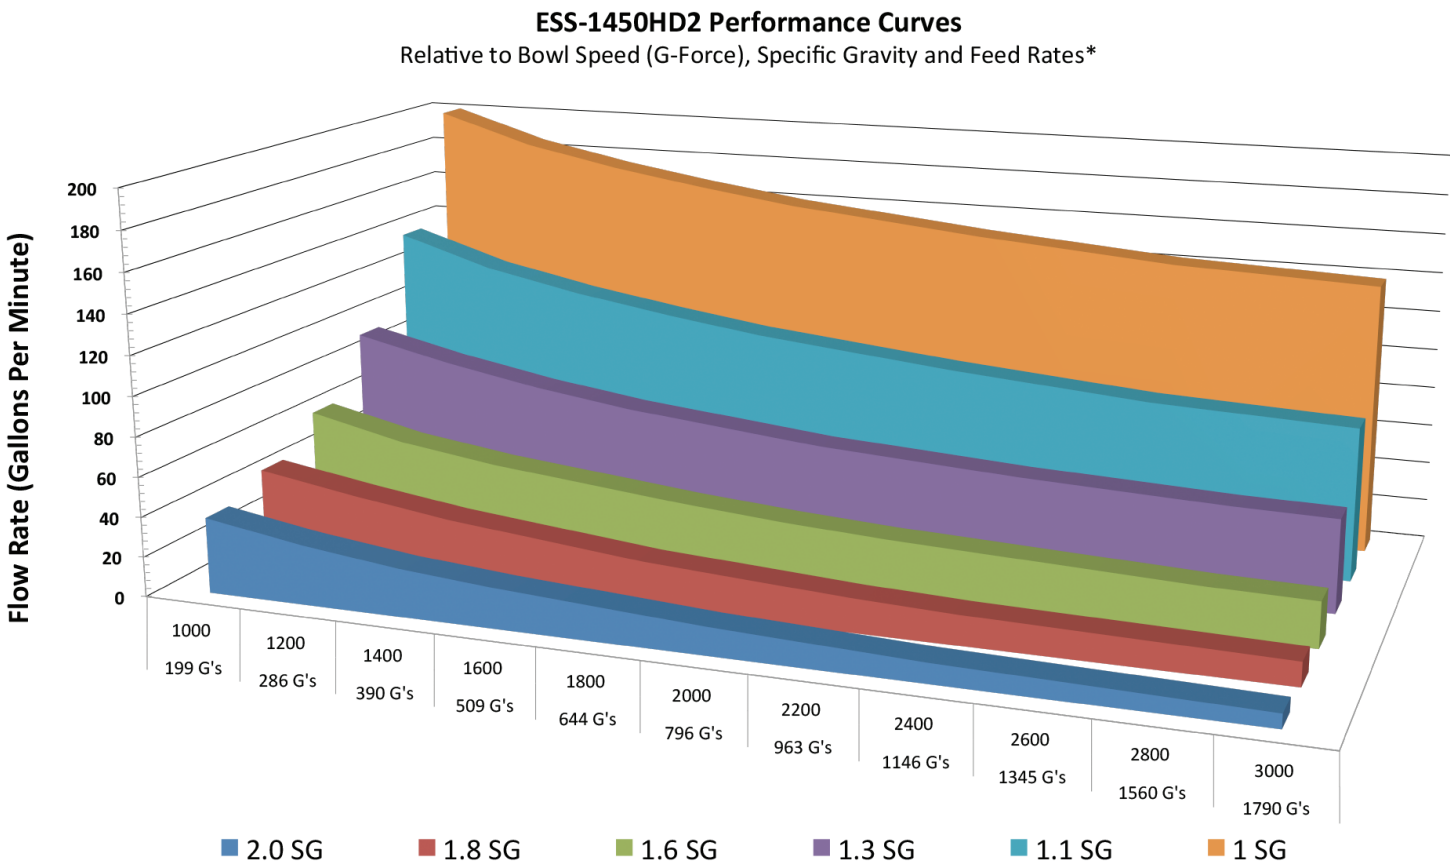

*Actual feed rates are affected by fluid plastic viscosity, particle size distribution, particle inhibition, and pond depth. The target flow rates highlighted by the above graph should be considered maximum capacities. The curves provided are provided as a guide only. Field conditions will ultimately dictate performance.



Touch Screen Control System

To ensure maximum operator flexibility, Elgin has developed a proprietary touch-screen VFD control system. Each stainless steel, NEMA 4X panel is built from the ground up using the most sophisticated electrical components and Yaskawa™ A1000 variable frequency drives. Elgin's VFD systems include a variety of enhanced features including, internal lighting, ventilation and heating, Ethernet porting for diagnostics and programming updates, and a custom designed user interface that allows for maximum operating flexibility and control. Elgin's proprietary user interface provides complete control of all systems, as well as, a sophisticated set of diagnostic tools, information libraries and read-only fault logs. Class 1 / Division 1 explosion proof panels with air conditioning and purged-air protection systems are also available.



Model Number	ESS-936HD2	ESS-1450HD2	ESS-1655HD	ESS-1967HD2	ESS-2272HD2
Equipment Image:					
Maximum G Force:	2,600 G's	2,100 G's	2,300 G's	2,600 G's	2,750 G's
Maximum Speed:	4,500 rpm	3,250 rpm	3,400 rpm	3,100 rpm	3,000 rpm
Hydraulic Capacity:	75 gpm (4.7 lps)	200 gpm (12.6 lps)	300 gpm (18.9 lps)	500 gpm (31.5 lps)	550 gpm (34.7 lps)
Bowl Construction:	Carbon or Stainless Steel	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel	Carbon or 304 Stainless Steel
Bowl Diameter:	9" (229 mm)	14" (356 mm)	16" (406 mm)	18.5" (470 mm)	21.5" (546 mm)
Bowl Length:	36" (914 mm)	49.5" (1,257 mm)	55" (1,397 mm)	67" (1,702 mm)	72" (1,829 mm)
Weight:	4,500 lbs (2,064 kgs)	7,000 lbs (3,175 kgs)	7,500 lbs (3,402 kgs)	11,500 lbs (5,216 kgs)	14,000 lbs (6,350 kgs)
Dimensions:	81" (2,057 mm) L x 25" (635 mm) W x 30" (762 mm) H	103" (2,616 mm) L x 74" (1,879 mm) W x 48" (1,219 mm) H	145" (3,683 mm) L x 36" (914 mm) W x 57" (1,447 mm) H	186" (4,724 mm) L x 50" (1,270 mm) W x 62" (1,574 mm) H	156" (3,957 mm) L x 82" (2,065 mm) W x 51" (1,280 mm) H
Gearbox Ratio:	40:1	52:1 or 125:1	56:1	80:1	48:1

www.ElginSeparationSolutions.com

